# 17.3 inch Ultra-thin LCD screen lifter paperless conference system

# **Basic Information**

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:

# China JUNNAN CE,ROHS, ISO,CCC JN-17.3-TB 1 US\$ 380 740CM\*140CM\*715CM 7-20 L/C, D/A, D/P, T/T, Western Union,

MoneyGram

1-50 ≥51Communicative

## Product Specification

- Product Name:
- Suitable For:
- Item:
- Material:
- Application:
- Brand:
- Transmission Method:
  - 2
- Power Supply:Highlight:
- Verborgen Bureau Monitor Lift Conference Room LCD Flip Up Mechanism With Pop Up Microphone Aluminum Alloy Meeting Room Conference Room JUNNAN Gear 220V
- Icd paperless conference system, Icd computerized conference system, Icd screen paperless conference system



## More Images



17.3 inch Ultra-thin LCD screen lifter paperless conference system

The LCD Screen Lifter is mainly used in senior executive conference table, built-in high performance touch function, can be configured with microphone, one key lift, front and back adjustment, equipped with anti-pinch function, safe and worry-free, hidden embedded installation is very beautiful.

#### **Our Advantages**

we have CNC machine cutting technology and laser technology, Newest conference table LCD Screen Lifter technology to ensure that the product is ultra-high standards.

The product adopts advanced technology application, humanized design, convenient operation mode


And our junnan equipment has a variety of certificates certification such as CCC, CE certificate, ROHS, ISO certification, the product is safe and high quality, with export qualification, is a direct factory with favorable price, has its own factory and has been operating for many years.

Our equipment has CCC, CE, ROHS, ISO certification and other certifications, product safety and quality, with export qualifications.

We focus on innovation, continuous product and service development and innovation, to be able to provide customers with more competitive solutions to meet the growing needs of our customers.


#### JUNNAN LCD lifter exterior dimensions

		I	(Noto)Euroiture Opening Deference
Model Numbe	Panel Size	Enclosure Size	(Note)Furniture Opening Reference Size
15.6-inch LCD screen lifter	426(L)*80(W)*3(Thick)	411(L)*75(W)*570(Thick)	Panel:427(L)*81(W)*3(H)MM
	MM Ó	MM )	Case:413(L)*77(W)*570(H)MM
17.3-inch LCD screen lifter	470(L)*80(W)*3(Thick)	449(L)*75(W)*570(Thick)	Panel:471(L)*81(W)*3(H)MM
	MM	MM	Case:451(L)*77(W)*570(H)MM
18.5-inch LCD screen lifter	492(L)*80(W)*3(Thick)	476(L)*75(W)*570(Thick)	Panel:493(L)*81(W)*3(H)MM
	MM	MM	Case:478(L)*77(W)*570(H)MM
21.5-inch LCD screen lifter	560(L)*80(W)*3(Thick)	544(L)*75(W)*630(Thick)	Panel:561(L)*81(W)*3(H)MM
	MM	MM	Case:562(L)*77(W)*630(H)MM
23.8-inch LCD screen lifter	610(L)*80(W)*3(Thick)	594(L)*75(W)*630(Thick)	Panel:611(L)*81(W)*3(H)MM
	MM	MM	Case:596(L)*77(W)*630(H)MM
15.6 " LCD Lifter with	532(L)*80(W)*3(Thick)	515(L)*75(W)*630(Thick)	Panel:533(L)*81(W)*3(H)MM
Microphone	MM	MM	Case:517(L)*77(W)*630(H)MM
17.3" LCD Lifter with	570(L)*80(W)*3(Thick)	553(L)*75(W)*630(Thick)	Panel:571(L)*81(W)*3(H)MM
Microphone	MM	MM	Case:555(L)*77(W)*630(H)MM
18.5" LCD Lifter with	610(L)*80(W)*3(Thick)	592(L)*75(W)*630(Thick)	Panel:611(L)*81(W)*3(H)MM
Microphone	MM	MM	Case:594(L)*77(W)*630(H)MM
21.5" LCD Lifter with	680(L)*80(W)*3(Thick)	600(L)*75(W)*630(Thick)	Panel:681(L)*81(W)*3(H)MM
Microphone	ŇM Ó	MM Í	Case:662(L)*77(W)*630(H)MM
23.8" LCD Lifter with	720(L)*80(W)*3(Thick)	704(L)*75(W)*630(Thick)	Panel:721(L)*81(W)*3(H)MM
Microphone	MM	MM	Case:706(L)*77(W)*630(H)MM
27-inch LCD screen lifter	687(L)*80(W)*3(Thick)	671(L)*75(W)*680(Thick)	Panel:688(L)*81(W)*3(H)MM
	MM	MM	Case:673(L)*77(W)*680(H)MM

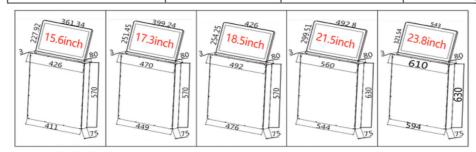





Installation steps (1)Determine the installation position of the desktop first, according to the Monitor lift of the elevator chassis in the desktop to open the corresponding hole

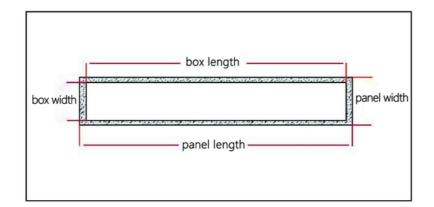

(2) Then countersink the lifter panel accordingly to the size of the lifter panel

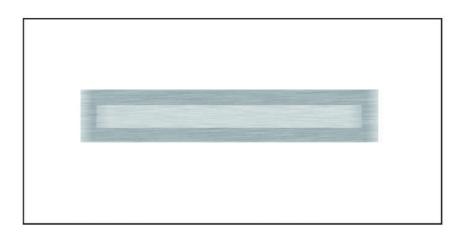

(3) Be sure to remove the anti-vibration screws before turning on the power.

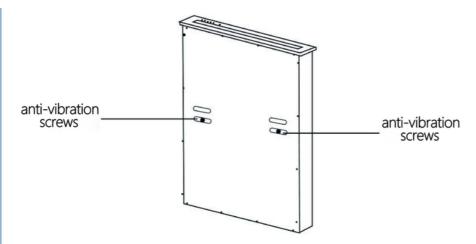

(4) Put the lifter inside the open hole, and then connect the power to lift 1-3 times to ensure normal operation. Will be connected to the line on / off HDMI, data transmission, VGA input / output power cord) as follows



(5) installation is complete (Note: the possibility that the Monitor lift can not move: ① battery socket is not plugged in; ② through the controller is powered, you can press the panel button test)

#### FAQ:

If you meet the product you like, contact us as soon as possible.

Any small request, we will try to meet, you can tell me your request, like style, logo, color, size and any other requirements, then I will make a design sketch as your requirements and accurate the price for you reference.

1.How many days you need to install the equipment? Re: The installation time depends on the type and quantity of equipment. The fastest is 1 day, and the longest is three or four days;

2.Can I transfer the money to you then you pay to other supplier? Re:No problem, I can do it for you;

3.How long it takes you to provide the designing options for us? Re:1-2days

4.Where is your factory located? Re:We are a conference system supplier located in Guangzhou

5.Can I only buy some spare parts from you? Re: sure;

